


## **Basic Sealer 100**

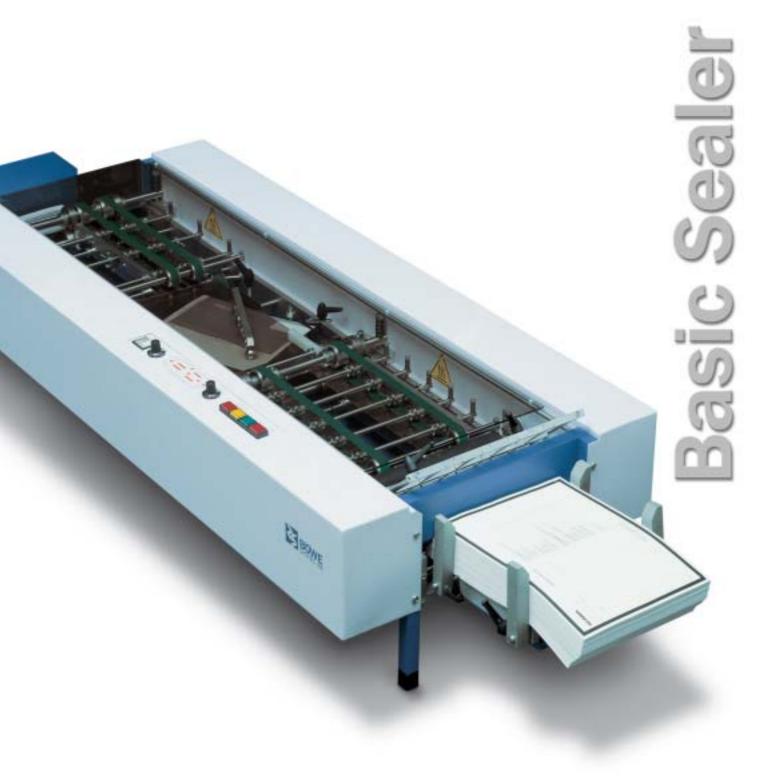

# **Basic Sealer 100**

### **Compact and Reliable**

#### Safe & Economical

The unique sealing technique with both heat and pressure gives a safe and clean production of important information. Different kinds of preglued forms or the use of a frame of toner for the sealing, can be processed. The BÖWE SYSTEC Sealer gives great flexibility and short pay-off time.

#### Versatility & Cost-Efficiency

The BÖWE SYSTEC Sealer 100 is equipped with two folding pockets for single-, wrap-, Z- and double-folding. Perforation wheels are an option, which gives an extra cost-efficient alternative. Simply print plain forms and let the BÖWE SYSTEC Sealer fold, seal and perforate them into finished mailers.

#### Easy to Operate

The BÖWE SYSTEC Sealer 100 is very easy to use. There are jam detectors all along the paper path and the machine is easy to control from the operator's panel.

No special training is required.



#### **Technical Data**

#### Standard Equipment

- Infeed unit
- 2 Folding units
- 4 Heaters4 Pressure wheels
- Stacker table
- Jam detectors
- Turning unit

#### Options

- Perforation wheels
- Counter
- External connection to solomachines for continuous forms
- Supporting stand
- Extra conveyor stacker
- Integrated burster 8" 14" for continuous forms

#### Dimensions

Length 1,600 mm
Width 530 mm
Height
Weight 55 kg

#### Finish

Two coloured

#### Connected Loads

Vo	ltage	. 230	V/10 Amp
1	Phase		50/60 Hz
Po	wer input	m	ax. 1.4 kW
Н	eat emission		0.84 kJ/s

#### Output

Up to 5,000 sheets/hour

#### **Paper Specifications**

Length	8" - 12"
Width	205 - 230 mm
Weight	90 - 120 ar/m <sup>2</sup>

Other formats and weights on request.



BÖWE SYSTEC AB Rissneleden 140-142 Box 2016 17402 Sundbyberg, Sweden Phone: +46 8 564 212 20 Fax: +46 8 564 212 21

E-mail: bs.nordic@boewe.se Internet: http://www.boewe.se

Order no.: 01/548